
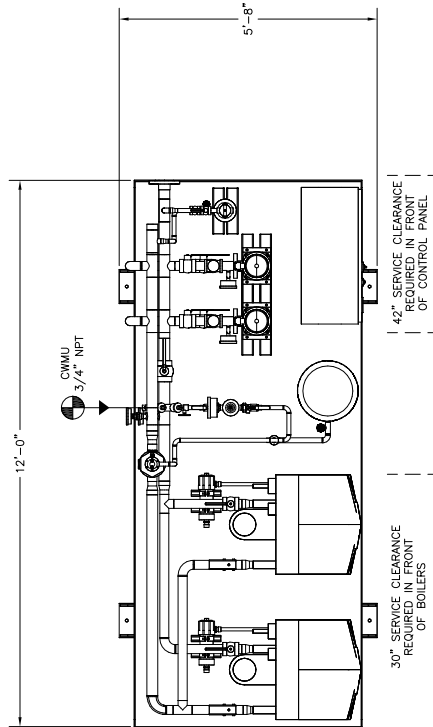


SYMBOL	MANUFACTURER	MODEL	GAS		CAPACITY, WATER			ELECTRICAL				
			MBTU/HR INPUT (MAX/MIN)	MBTU/HR OUTPUT (MAX/MIN)	EFF	GPM	TDH		HWS	HWR	VOLTS/HZ/PH	FLA
HHM	FLOWTHERM	SYSTEMS	CD800FT	798/40	784/77	98%	50	65'	160°F	130°F	460/60/3	9.8

PIPE SUPPORTS TO BE INSTALLED
AS REQUIRED. SOME NOT SHOWN
FOR CLARITY

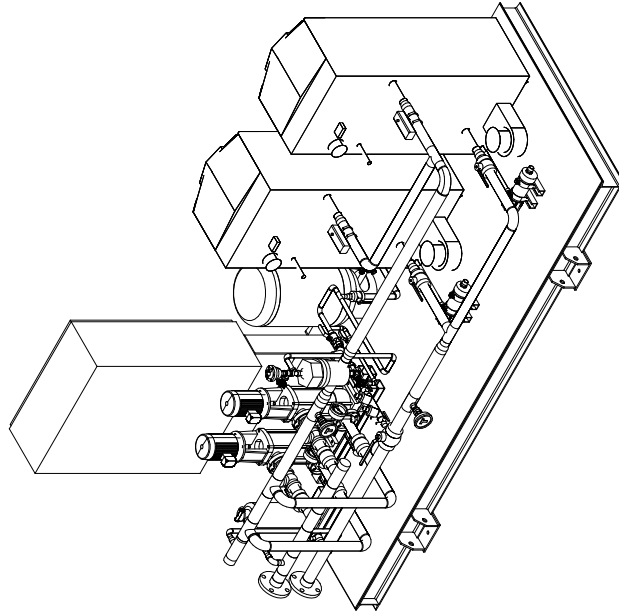

RIGHT END VIEW

- (1) COMPLETE SYSTEM TO BE HYDRO TESTED TO 125 PSI PRIOR TO SHIPPING.
- (2) STEEL FRAME AND COMPONENTS TO RECEIVE TWO COATS OF GRAY MACHINE ENAMEL.
- (3) ALL WELDED WATER PIPING TO BE WELDED IN ACCORDANCE TO ASME B31.9
- (4) COMPLETE PACKAGE SYSTEM TO BE UL LISTED.

 = DENOTES CONTRACTOR POINT OF CONNECTION

UL
LISTED
PACKAGED PUMPING SYSTEMS
&
HEAT TRANSFER SYSTEMS

APPROXIMATE SHIPPING WEIGHT: 3,570 LBS.
APPROXIMATE OPERATING WEIGHT: 3,910 LBS.

—	CONTRACTOR:	DRWN.	DATE
—			

ND	08
TOLERANCE	
DEC.	FF
500"	1

THIS DRAWING AND THE INFORMATION DEPICTED THEREIN IS THE PROPERTY OF FLOWTHERM SYSTEMS, A DIVISION OF CALIFORNIA HYDRONICS CORP. COPIES ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR COPIED, OR USED AS THE BASIS FOR THE MANUFACTURING OR SALE OF PRODUCT WITHOUT PRIOR WRITTEN PERMISSION OF CALIFORNIA HYDRONICS CORP.



DRAWING TITLE: HYDRONIC HEATING MODULE

FAB No.	DRAWING No.
-	HHM-CD800FT

REV	A
-----	---