


RELIEF VALVES AND
EQUIPMENT DRAINS
TO BE PIPED TO DRAIN
OR VENT BY CONTRACTOR
PER CODE REQUIREMENT

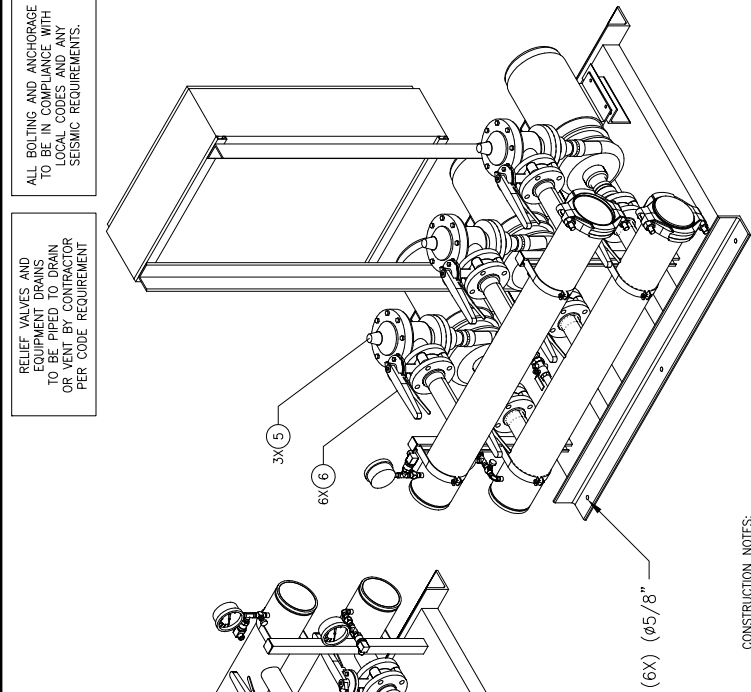

CONSTRUCTION NOTES:



1. SUCTION AND DISCHARGE HEADERS ARE GROOVED ON BOTH ENDS.
2. END CAPS CAN BE PLACED ON EITHER END OF HEADERS.
3. SYSTEM DESIGNED FOR INDOOR INSTALLATION.

- GPM	- PSI	- PSI
TOTAL FLOW	TOTAL DISCHARGE PRESSURE	AVAILABLE PRESSURE
TOTAL SYSTEM CAPACITY		


ITEM	TAG	MANUFACTURER	SERIES	MODEL	GPM	TDH	HP	RPM	VOLTS/HZ/PH	ENCLOSURE
3	P-3	Goulds	3656	1 1/2 x 2-8	-	-	7 1/2	3500	460 / 60 / 3	TEFC P.E.
2	P-2	Goulds	3656	1 1/2 x 2-8	-	-	7 1/2	3500	460 / 60 / 3	TEFC P.E.
1	P-1	Goulds	3656	1 1/2 x 2-8	-	-	7 1/2	3500	460 / 60 / 3	TEFC P.E.

10	-	-	
9	-	-	
8	-	-	
7	-	-	
6	6	-	LOG TYPE BUTTERFLY VALVE - 2 1/2"
5	3	-	CLA-VAL CHECK VALVE - 2 1/2"
4	1	P-3	GOULDS 3656 S 1 1/2 X 2-8 BRONZE FITTED END SUCTION CAST IRON PUMP
3	1	P-2	GOULDS 3656 S 1 1/2 X 2-8 BRONZE FITTED END SUCTION CAST IRON PUMP
2	1	P-1	GOULDS 3656 S 1 1/2 X 2-8 BRONZE FITTED END SUCTION CAST IRON PUMP
1	1	-	VARIABLE SPEED PUMP CONTROL PANEL


EQUIPMENT SCHEDULE		
ITEM	QTY	DESCRIPTION

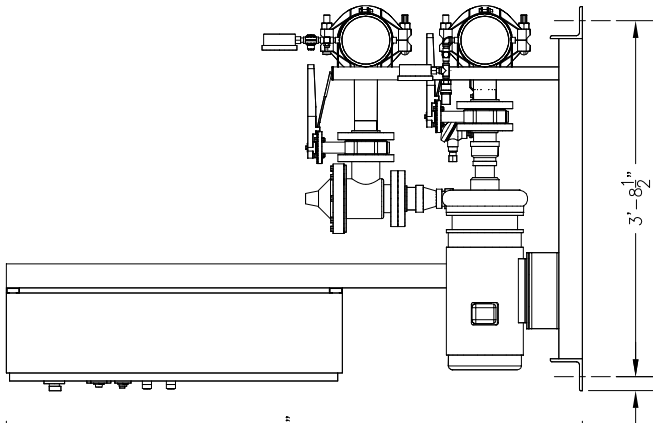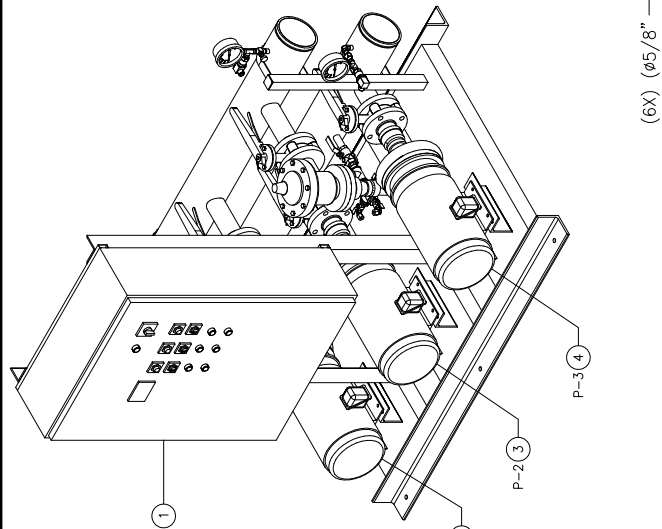

RIGHT END VIEW

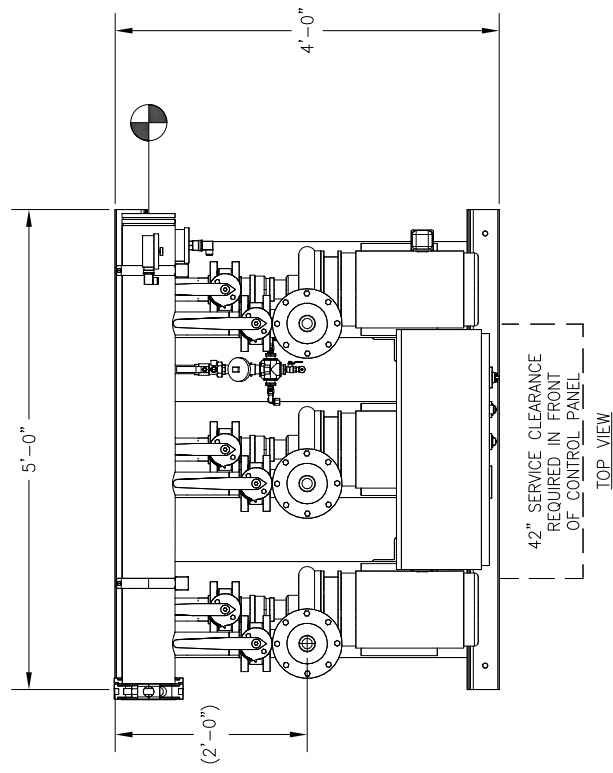

TOP VIEW

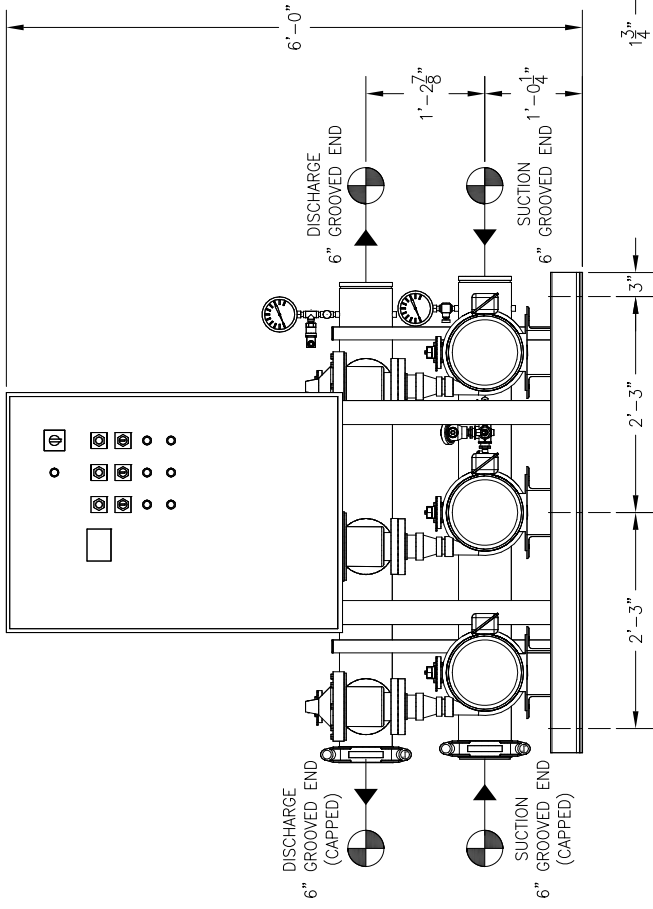

FRONT VIEW

GENERAL NOTES:

- (1) SINGLE POINT POWER CONNECTION AT CONTROL PANEL.
- (2) HYDRO PRESSURE CHECK AT 125 PSI.
- (3) ASSEMBLED SYSTEM TO BE PAINTED WITH INDUSTRIAL MACHINE ENAMEL PRIOR TO SHIPMENT.

 = DENOTES CONTRACTOR POINT OF CONNECTION

UL
LISTED
PACKAGED PUMPING
& HEAT TRANSFER S

PROJECT NAME:

CUSTOMER:

	DRAWN BY DATE ACD 04/18/16	CHECKED BY APPROVED BY	TOLERANCES UNLESS OTHERWISE SPECIFIED DEC. FRAC. ANGLE SIZE SCALE .500" 1/2 5° C 1" = 1'
	PRODUCT WITHOUT PRIOR WRITTEN PERMISSION OF CHC.		

APPROXIMATE SHIPPING WEIGHT:	1,719 LBS.
APPROXIMATE OPERATING WEIGHT:	1,898 LBS.

FlowTherm *systems*
HAYWARD, CALIFORNIA

DRAWING TITLE:

FAB No.	DRAWING No.	REV
	FEV3-12	1