


F:\PACKAGED SYSTEM DRAWINGS\FTPB\FEV\FEV3-X\FEV3-20.DWG

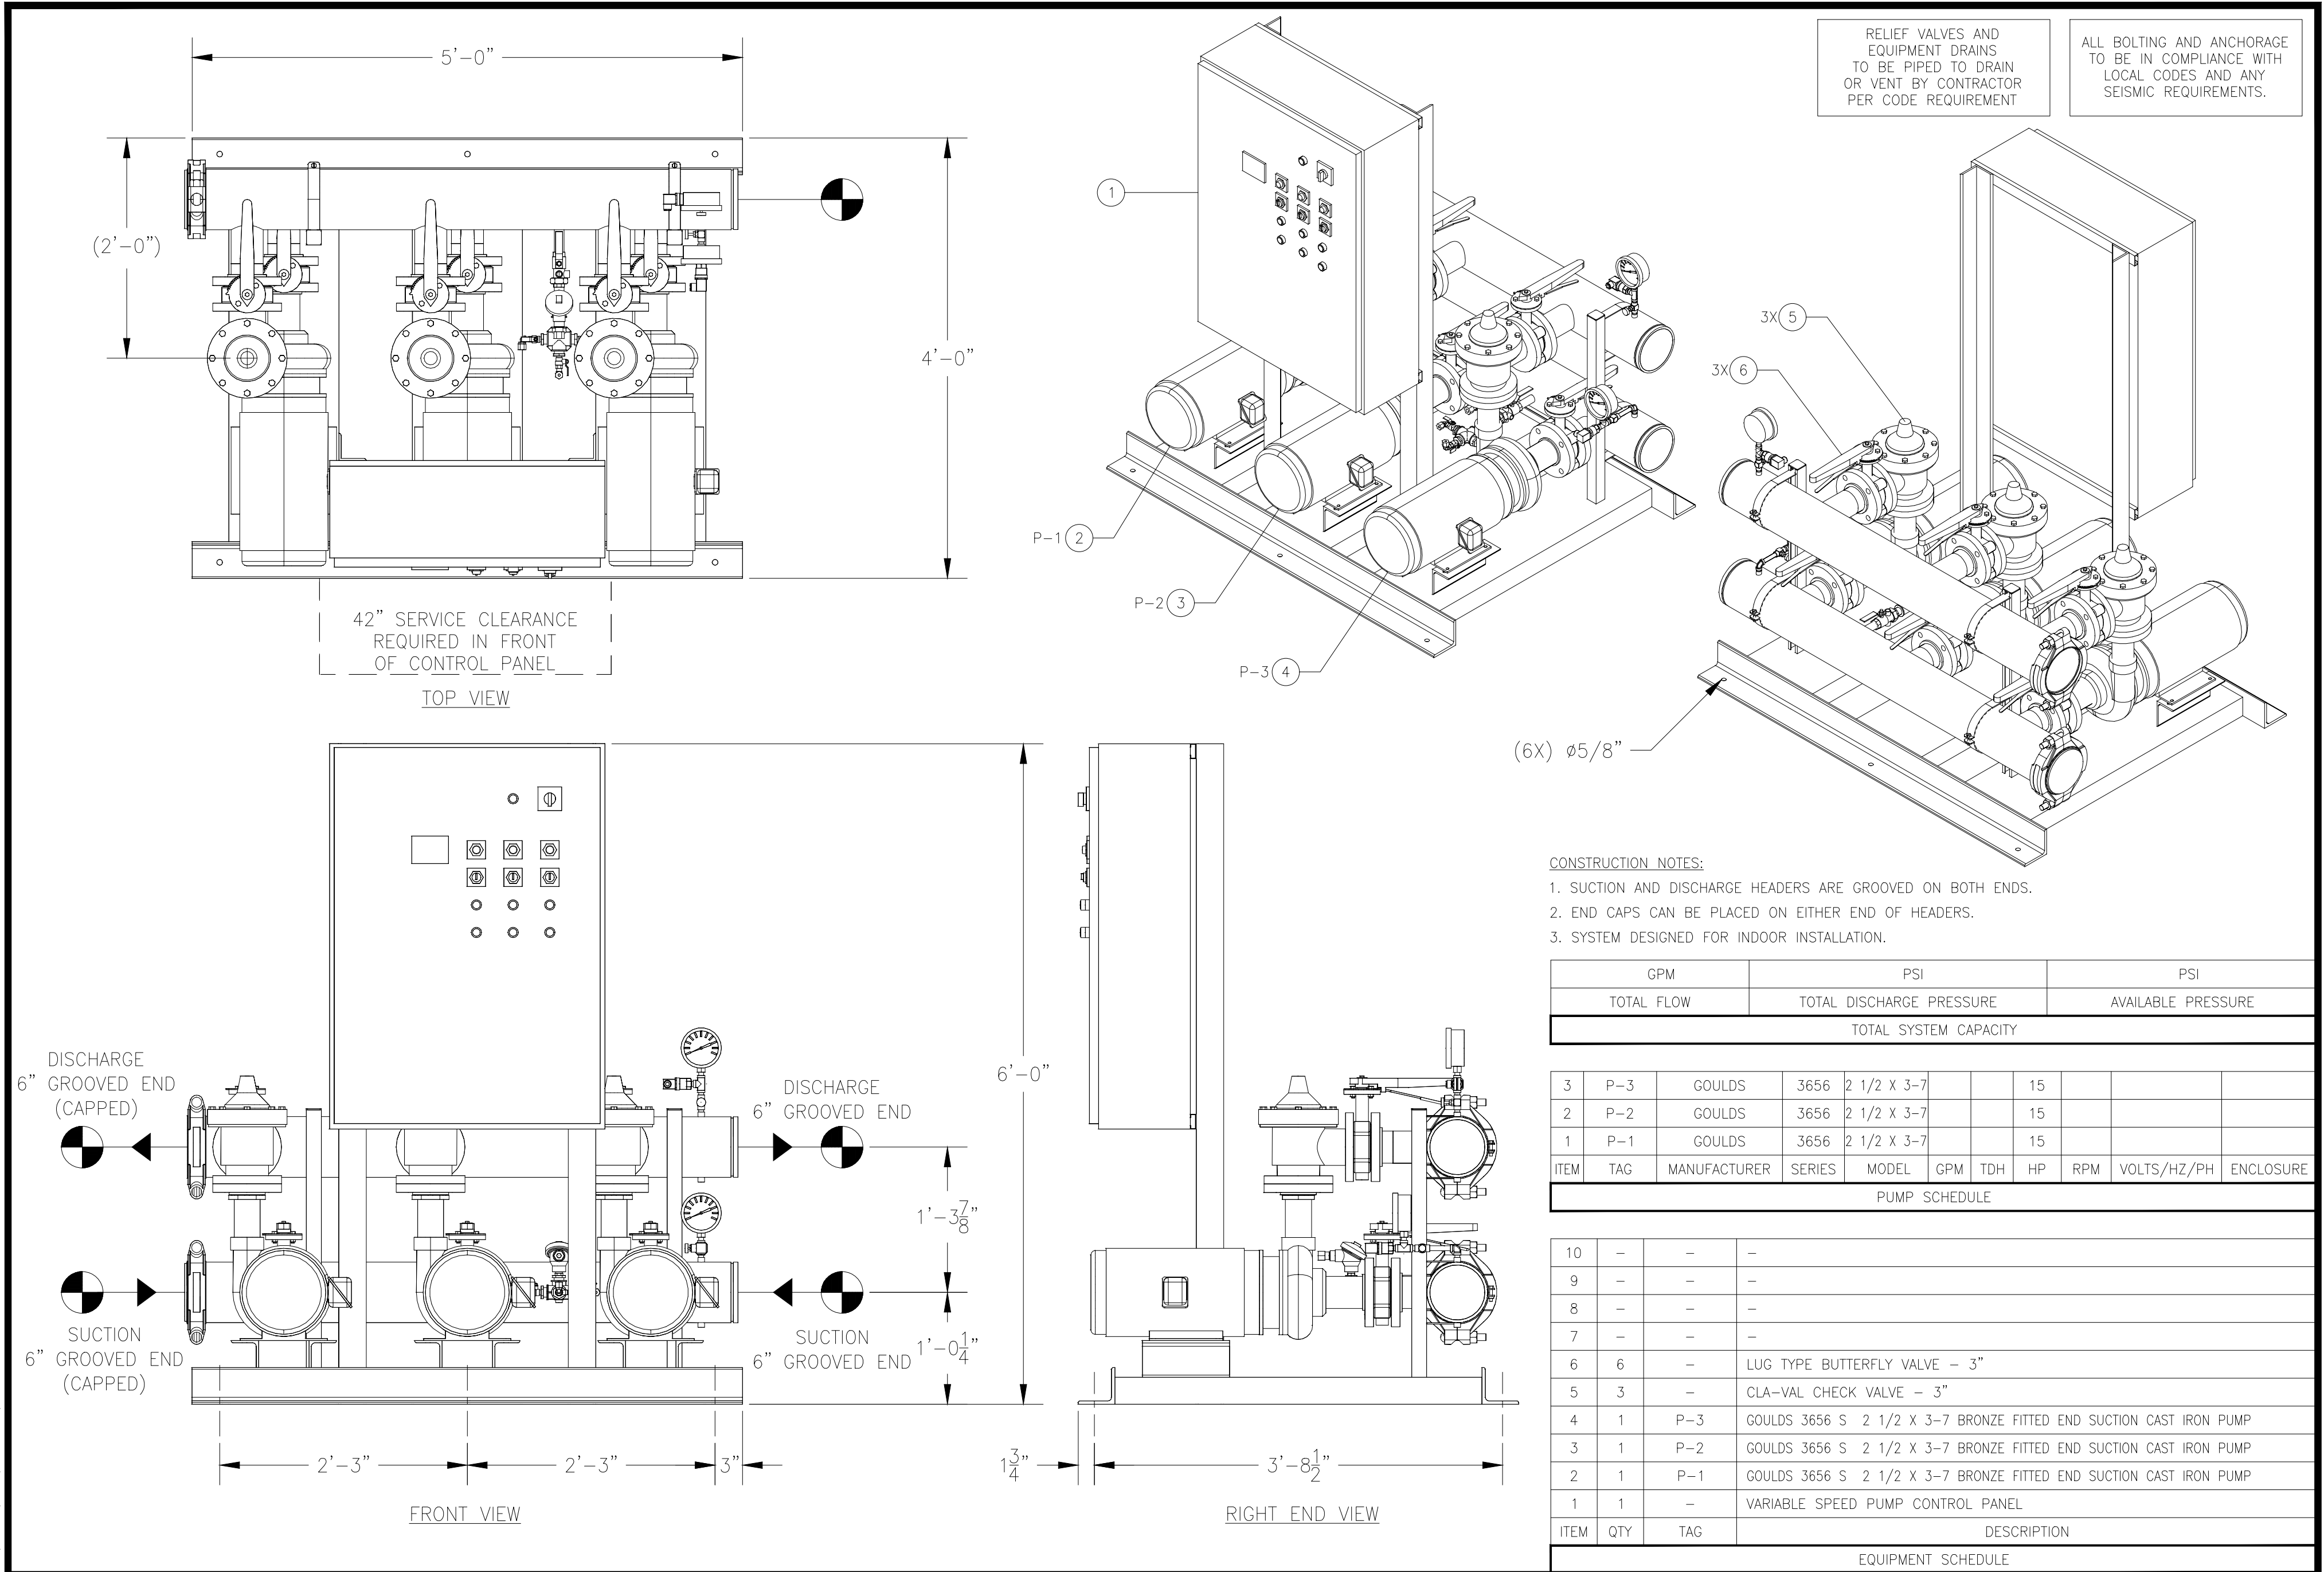

GENERAL NOTES:

- (1) SINGLE POINT POWER CONNECTION AT CONTROL PANEL.
- (2) HYDRO PRESSURE CHECK AT 125 PSI.
- (3) ASSEMBLED SYSTEM TO BE PAINTED WITH INDUSTRIAL MACHINE ENAMEL PRIOR TO SHIPMENT.

= DENOTES CONTRACTOR POINT OF CONNECTION

UL LISTED

PACKAGED PUMPING SYSTEMS & HEAT TRANSFER SYSTEMS

APPROXIMATE SHIPPING WEIGHT: 1,855 LBS.

APPROXIMATE OPERATING WEIGHT: 2,040 LBS.

THIS DRAWING AND THE INFORMATION DEPICTED THEREIN IS THE PROPERTY OF FLOWTHERM SYSTEMS, A DIVISION OF CHC. COPIES ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR MANUFACTURING OR SALE OF PRODUCT WITHOUT PRIOR WRITTEN PERMISSION OF CHC.

PROJECT NAME:

CUSTOMER:

DRAWN BY DATE
ACD 01/05/15

CHECKED BY APPROVED BY

TOLERANCES UNLESS OTHERWISE SPECIFIED

DEC. .500"	FRAC. 1/2"	ANGLE 5°	SIZE C	SCALE 1" = 1'-0"
------------	------------	----------	--------	------------------

FlowTherm systems
HAYWARD, CALIFORNIA

DRAWING TITLE:
FEV3-20 - VARIABLE SPEED TRIPLEX PRESSURE BOOSTER

FAB No.	DRAWING No. FEV3-20	REV
---------	------------------------	-----